



High Standards. Higher Performance. Highest Temperatures.

Huyglas® 1405 from Filtration Specialties, Inc.


Specifications

Features and Benefits

- Used in emissions control applications such as lime kilns, kaolin kilns and cement clinker coolers
- Typically used in applications where ePTFE membranes have failed due to temperature excursions
- Handles excursions at 600°F (316°C) that will damage ePTFE membrane
- Replaces Nomex® in applications where process chemistry or conditions have caused bag failures
- More chemical resistance than P84® or Nomex®
- 525°F (274°C) operating temperature, higher than Nomex® or P84®
- Performance-priced competitively with glass/membrane
- Meets particulate emission and opacity regulations in any routine application
- Suitable for on-line pulse cleaning which is not recommended for woven glass
- Less prone to installation/handling damage than ePTFE membrane

Test Results

- Testing performed by a nationally recognized independent testing lab
- Circulating Fluidized Bed Boiler Dust loaded at 3 Grains/ACF
- A/C ratio of 4.5:1
- Median particle size by count is 0.544 μ with 85% of particles finer than 1 μ in diameter

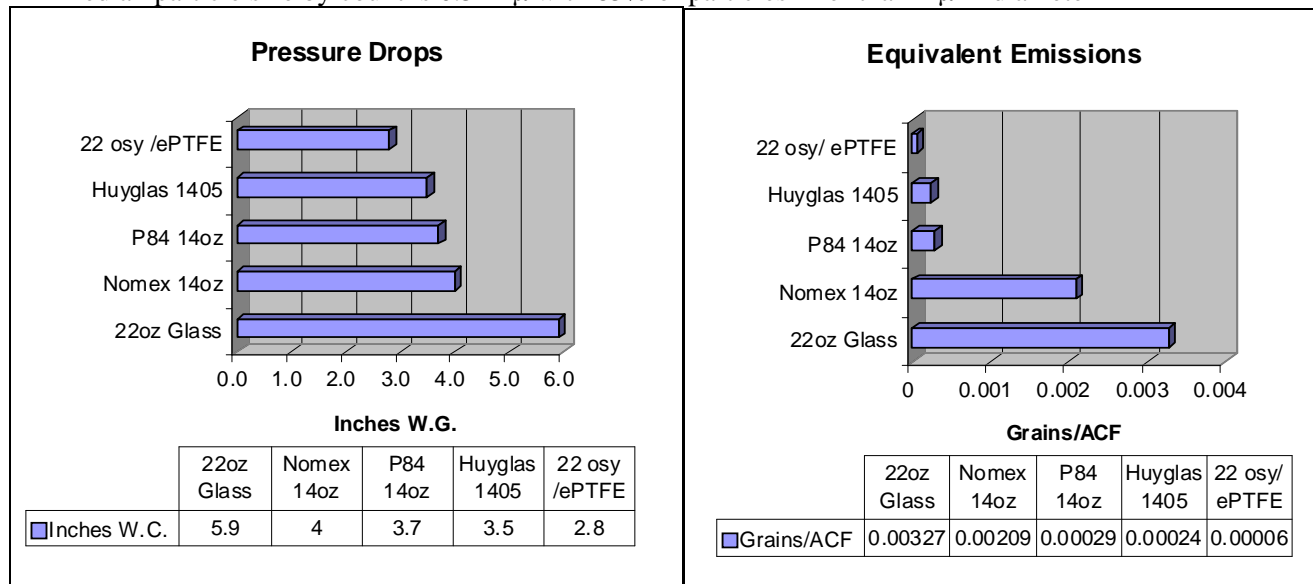

Specifications

- Base scrim: 100% Fiberglass
- Batt fiber: 100% Fiberglass
- Chemical resistant finish: Silicone-based resin
- Nominal weight/width: 22 oz/yd² (745 g/m²) and 63-68" (160-172) width
- Permeability: 55 +/- 15 cfm @ 0.5" w.c.

High Temperature Fiber Materials

+1-757-363-9818
 +1-917-464-9889
 Sales@HighTempFelt.com

Voice
 Fax
 Email

<http://www.HighTempFelt.com>